


## Fixture Specification

**Product Code :** SURFACE MOUNTED FLU. ASYMMETRIC TYPE/1\*T8 36W (120cm.)

**Description :** T8 ASYMMETRIC BATTEN TYPE LUMINAIRE

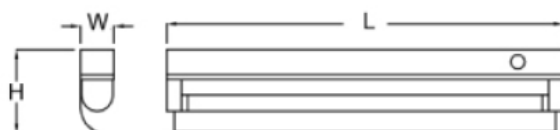

WATT	DIMENSION (mm.)		
	L	W	H
1 x T8 36w.	1245	60	133

- High quality cold-rolled steel housing
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Powder painted sheel asymmetry cover. Optional: 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87)
- Rotary-locked type starter holder (TIS.344-1987 Standard)
- Heavy duty spring-locked type lamp holder (TIS.344-1987 Standard).
- Cable THW 1.0 sq.mm. 70°C (TIS.11-1988 Standard).
- Suitable for general wall mounting purpose with asymmetry light distribution

Specilight provides professional lighting design services and lighting consulting to architects, interior designers, project managers, landscape architects and property owners from small to large projects. Services vary from conceptual lighting design through to opening day and beyond.

Projects may range from a few hours of consulting to large scale projects with complete documentation followed with on site services.