


Fixture Specification

Product Code : RECESSED FLU. NEO-RLV/3*T8 36W (60x120cm.)

Description : T8 RECESSED LOUVER LUMINAIRE

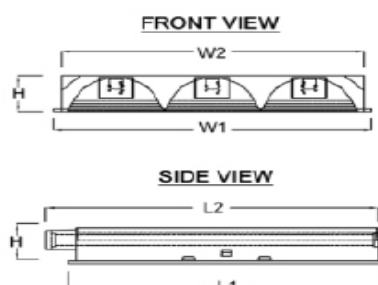

WATT	DIMENSION (mm.)					CUT OUT (mm.)
	L1	L2	W1	W2	H	
3 x T8 36w.	1195	1222	595	565	90	1175 x 575

HOUSING

- Made of high quality cold-rolled steel sheet
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Heavy duty rotary-locked type (G13) lamp holder (TIS.344-1987 Standard)
- Rotary-locked type starter holder (TIS Standard)
- Cable THW 1.0 sq.mm. 70°C (TIS.11-1988 Standard). Optional: 105°C 18AWG UL Standard.

REFLECTOR & LOUVER

- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) mirror finished (DIN 5036-2) for normal usage.
- 99.85% high purity anodized aluminium louver with Total Reflectance of 87% (87) mirror finished (DIN 5036-2) for longitudinal with aluminium profile to anti-glare. Standard 5 blades for 18w. and 10 blades for 36w.
- Louver and profiles are applied to anti-glare.
- Spring-lock type for ease of maintenance.

INSTALLATION & APPLICATION

- For recessed T-bar and gypsum ceiling installation.
- Recommended for commercial buildings, shops, hospitals, department stores, schools, etc.

Specilight provides professional lighting design services and lighting consulting to architects, interior designers, project managers, landscape architects and property owners from small to large projects. Services vary from conceptual lighting design through to opening day and beyond.

Projects may range from a few hours of consulting to large scale projects with complete documentation followed with on site services.