


Fixture Specification

Product Code : SURFACE MOUNTED FLU. NEO-SLV/2*T8 36W (30x120cm.)

Description : T8 SURFACE MOUNTED LOUVER LUMINAIRE

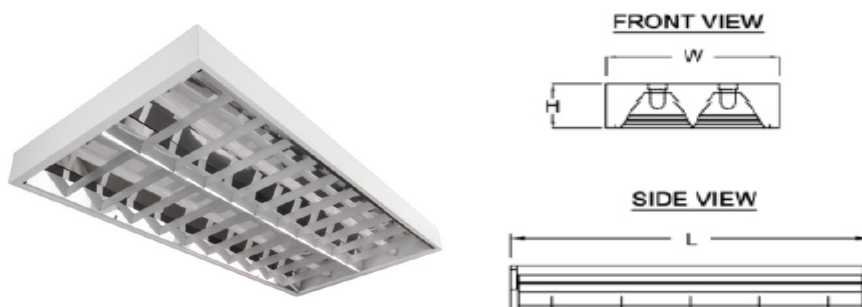

WATT	DIMENSION (mm.)		
	L	W	H
2 x T8 36w.	1222	295	80

HOUSING

- Made of high quality cold-rolled steel sheet
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Heavy duty rotary-locked type (G13) lamp holder (TIS.344-1987 Standard)
- Rotary-locked type starter holder (TIS Standard)
- Cable THW 1.0 sq.mm. 70°C (TIS.11-1988 Standard). Optional: 105°C 18AWG UL Standard.

REFLECTOR & LOUVER

- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) mirror finished (DIN 5036-2) for normal usage.
- 99.85% high purity anodized aluminium louver with Total Reflectance of 87% (87) mirror finished (DIN 5036-2) for longitudinal with aluminium profile to anti-glare. Standard 5 blades for 18w. and 10 blades for 36w.
- Louver and profiles are applied to anti-glare.
- Spring-lock type for ease of maintenance.

INSTALLATION & APPLICATION

- For surface mounted or suspension rod installation.
- Recommended for commercial buildings, shops, hospitals, department stores, schools, etc.