


Fixture Specification

Product Code : RECESSED FLU. NEO-RPC/4*T8 36W (60x120cm.)

Description : T8 RECESSED ACRYLIC DIFFUSER LUMINAIRE

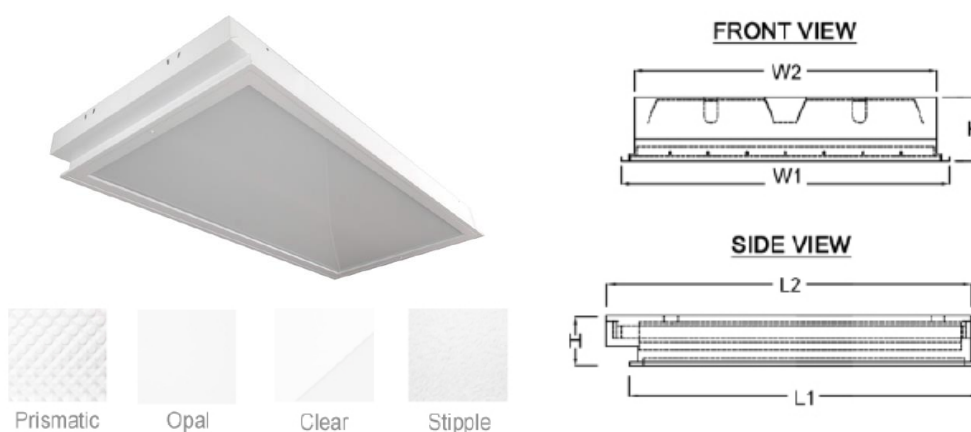

WATT	DIMENSION (mm.)					CUT OUT (mm.)
	L1	L2	W1	W2	H	
4 x T8 36w.	1195	1222	595	565	100	1175 x 575

HOUSING

- Made of high quality cold-rolled steel sheet
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Rotary-locked type starter holder (TIS Standard)
- Cable THW 1.0 sq.mm. 70°C (TIS.11-1988 Standard). Optional: 105°C 18AWG UL Standard.

REFLECTOR & DIFFUSER

- High quality acrylic diffuser with steel painted frame. Four acrylic diffusers are available: Prismatic (P), Opal (M), Stipple (O), and Clear (J)
- 99.85% high purity anodized aluminium reflector
- Spring-lock type frame for ease of maintenance.

INSTALLATION & APPLICATION

- For recessed T-bar and gypsum ceiling installation.
- Recommended for commercial buildings, hospital, laboratories, schools, etc.

SpecLight provides professional lighting design services and lighting consulting to architects, interior designers, project managers, landscape architects and property owners from small to large projects. Services vary from conceptual lighting design through to opening day and beyond.

Projects may range from a few hours of consulting to large scale projects with complete documentation followed with on site services.