


## Fixture Specification

**Product Code :** SURFACE MOUNTED FLU. L-TYPE/1\*T8 36W (120cm.)

**Description :** T8 L-TYPE ACRYLIC DIFFUSER LUMINAIRE

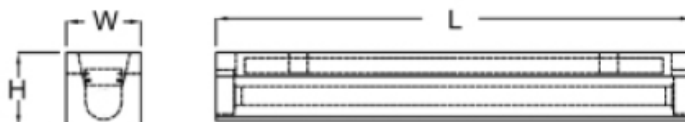

| WATT        | DIMENSION (mm.) |     |     |
|-------------|-----------------|-----|-----|
|             | L               | W   | H   |
| 1 x T8 36w. | 1245            | 100 | 100 |

- High quality cold-rolled steel housing
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- High quality acrylic diffuser with steel painted frame. Four acrylic diffusers are available: Prismatic (P), Opal (M), Stipple (O), and Clear (J)
- Rotary-locked type starter holder (TIS.344-1987 Standard)
- Heavy duty spring-locked type lamp holder (TIS.344-1987 Standard).
- Cable THW 1.0 sq.mm. 70°C (TIS.11-1988 Standard).
- Suitable for general wall mounting purpose with asymmetry light distribution

Specilight provides professional lighting design services and lighting consulting to architects, interior designers, project managers, landscape architects and property owners from small to large projects. Services vary from conceptual lighting design through to opening day and beyond.

Projects may range from a few hours of consulting to large scale projects with complete documentation followed with on site services.